

RS-VS Fire Shield

NOTE:

1. Follow these guidelines when the RS-VS Tilt system is installed on a metal roof

Framed Modules - Portrait, Single & Double Rail (Figure 1)

- When installing framed modules, both the Single and Double Rail configuration may be used with a minimum 5 degree tilt.
- The fire shield is an additional run of VS rail with Splices, End Clamps, and Mid Clamps along the bottom edge of the modules.
- The fire shield is required only on the South face of the array (see Figure 3).

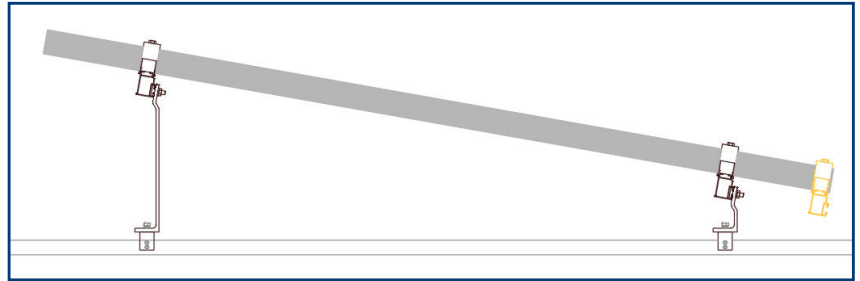


Figure 1

Frameless Modules - Portrait, Single & Double Rail (Figure 1)

- When installing frameless Type 3 modules, either the Single or Double Rail configuration may be used.
- A fire shield is not required

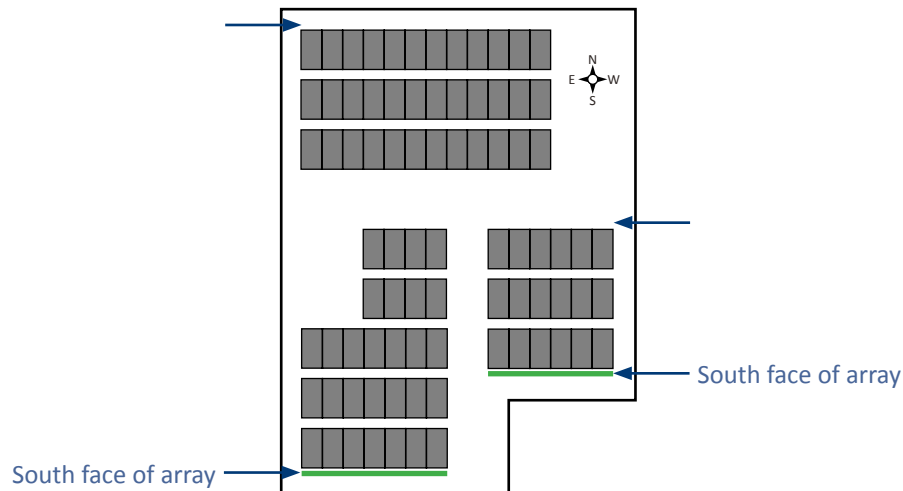


Figure 2